


PV-A10004

Integrated Solar Street Light

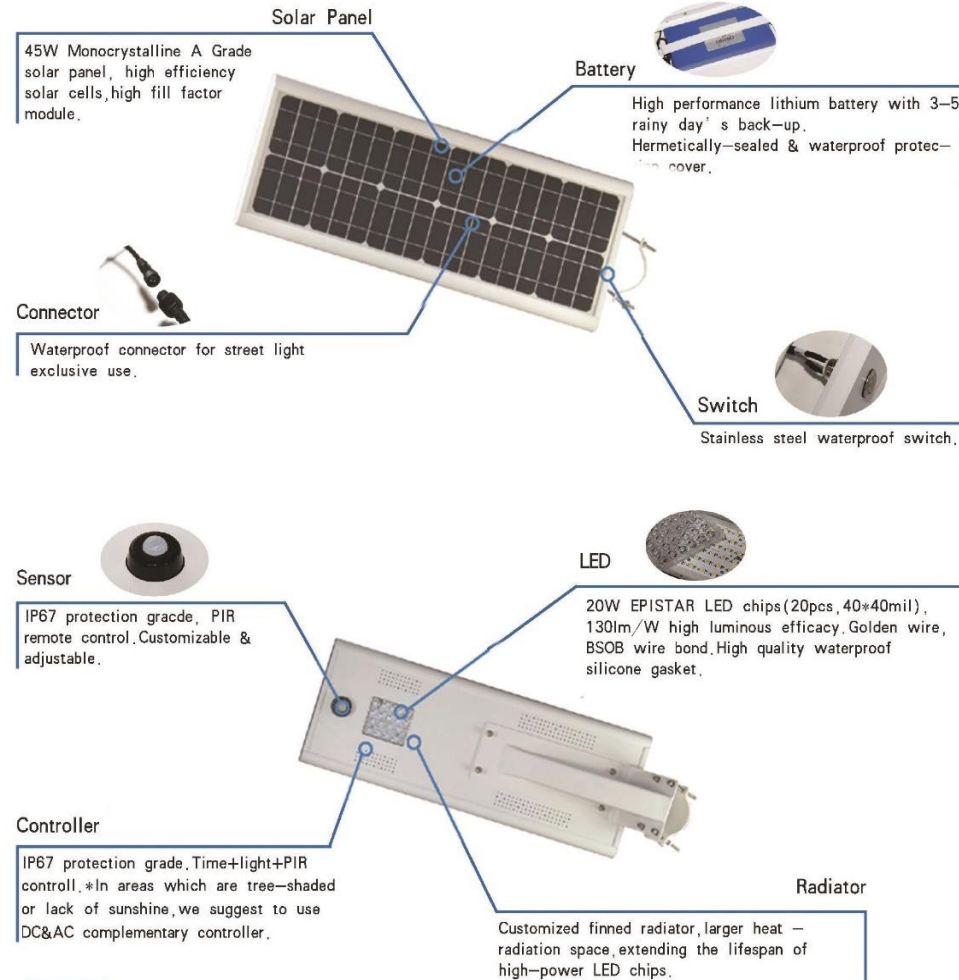

PV-A10004

Integrated Solar Street Light


**20
Watts**



Parameters

| | |
|------------------------------|--|
| Item No. | PV-A10004 |
| Solar Panel | 18V/45W Monocrystalline Solar Panel, Grade A |
| LED | 20W, 40*40mil Epistar Chip |
| Lifespan of LED | More Than 50,000 Hours |
| Luminous Flux | 2200lm ~ 2600lm |
| Beam Angle | 65° ± 130° |
| Color Temperature | 3000K ~ 7500K |
| Battery Type | Li-ion Lithium Battery / LiFePO ₄ Lithium Battery |
| Battery Capacity | 12V, 25AH / 12.8V, 18AH |
| Discharging Time | 18h (100% power), 42h (energy-saving mode) |
| Charging Time | 6h (AM1.5, 1000W/m ² , 25°C) |
| Working Temperature | -25°C ~ 55°C |
| Diameter of Mounted Lamppost | 76 ~ 89mm |
| Mounting Height | 4 ~ 6m |
| Mounting Space | 15 ~ 20m |
| Material | 6063 Aluminum, PC |
| Package Size | 920*380*190mm |
| Net Weight | 11.4KG |
| Gross Weight | 12.8KG |
| Control Mode | Light, Time and PIR Remote Control |
| Package Quantity | 396 sets/20' GP, 792 sets/40' GP |

Light spectrum



Size chart

