


PV-A10004

Integrated Solar Street Light

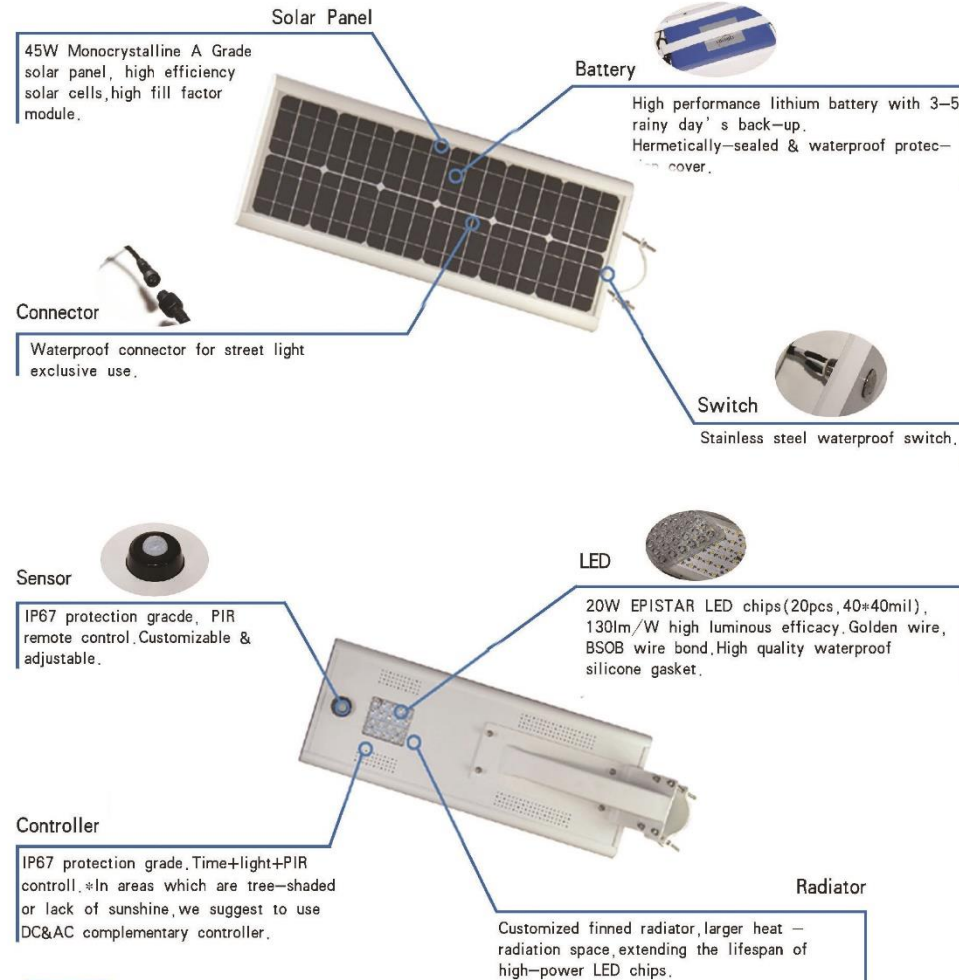

PV-A10004

Integrated Solar Street Light


**20
Watts**



Parameters

Item No.	PV-A10004
Solar Panel	18V/45W Monocrystalline Solar Panel, Grade A
LED	20W, 40*40mil Epistar Chip
Lifespan of LED	More Than 50,000 Hours
Luminous Flux	2200lm ~ 2600lm
Beam Angle	65° * 130°
Color Temperature	3000K ~ 7500K
Battery Type	Li-ion Lithium Battery / LiFePO ₄ Lithium Battery
Battery Capacity	12V, 25AH / 12.8V, 18AH
Discharging Time	18h (100% power), 42h (energy-saving mode)
Charging Time	6h (AM1.5, 1000W/m ² , 25°C)
Working Temperature	-25°C ~ 55°C
Diameter of Mounted Lamppost	76 ~ 89mm
Mounting Height	4 ~ 6m
Mounting Space	15 ~ 20m
Material	6063 Aluminum, PC
Package Size	920*380*190mm
Net Weight	11.4KG
Gross Weight	12.8KG
Control Mode	Light, Time and PIR Remote Control
Package Quantity	396 sets/20' GP, 792 sets/40' GP

Light spectrum



Size chart

