

Specification

Nominal Voltage	12V
Number of cell	6
Nominal Capacity	120Ah@10hr-rate (12.0A to 1.80V/cell @25°C)
Weight	Approx.36.0Kg
Terminal	M8,Φ=16&18
Container Material	ABS (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.
Rated Capacity	123Ah 20hr-rate (6.15A to 1.80V/cell @25°C)
	120Ah 10hr-rate (12.0A to 1.80V/cell @25°C)
	103Ah 5hr-rate (20.6A to 1.75V/cell @25°C)
	75.0Ah 1hr-rate (75.0A to 1.60V/cell @25°C)
Max. Discharge Current	600A(5sec)
Internal Resistance	Approx.3.5mΩ(Fully charged)
Operating Temp. Range	Discharge: -40°C~60°C
	Charge : -20°C~50°C
	Storage : -40°C~60°C
Cycle Use	Charging Current:≤24.0A
	Voltage:14.2V~14.4V
	Temperature compensation:-30mV/°C
Standby Use	Charging Current:No limit
	Voltage:13.6V~13.8V
	Temperature compensation:-20mV/°C
Self-Discharge	less than 1% at 25°C
Design Life	15 years (floating charge)



Introduction


The MOTOMA GEL-TECH batteries designed with 15+ years service life. The SOLID-GEL system can avoid corrosion and stratification. The special separator can properly prevent short-circuit. It can offer high deep discharge ability, super thermal stability, good recovery-ability after deep discharging. The deep discharge cycles of GEL-TECH batteries can be more than 50% compared with other normal AGM batteries.

Applications

- ◆ Auto control system & ATM machine
- ◆ Electronic apparatus and equipment
- ◆ Emergency light & Emergency backup power supply & Alarm/Security system
- ◆ Power generation system (solar and wind power system, etc.)
- ◆ Communication power & DC power
- ◆ Electric Power System (EPS)
- ◆ Uninterruptable Power System (UPS)
- ◆

Dimensions

Length	407±1mm (16.02 inches)
Width	175±1mm (6.81 inches)
Height	210±1mm (8.47 inches)
Total Height	240±1mm (9.45 inches)

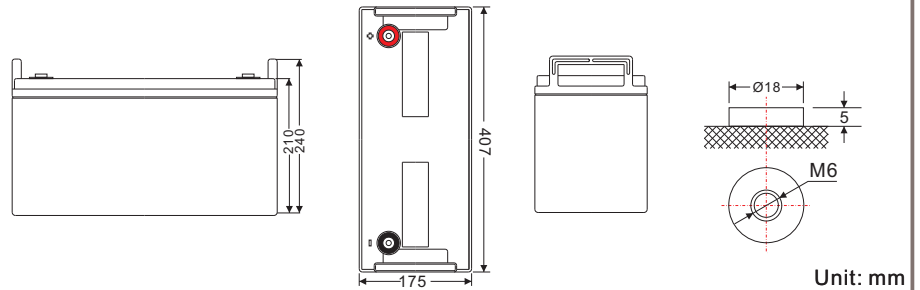


Constant Current Discharge Characteristics: A (25°C)

F. V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	408.7	292.9	213.1	133.8	75.61	43.17	30.36	25.13	21.16	14.60	12.58	6.651
1.65V/cell	397.8	278.7	208.7	131.6	75.26	42.84	30.25	25.01	21.04	14.49	12.46	6.531
1.70V/cell	374.9	268.8	205.5	130.4	74.57	42.52	30.01	24.89	20.91	14.37	12.34	6.410
1.75V/cell	336.6	248.1	195.6	127.1	73.87	42.19	29.90	24.66	20.66	14.25	12.21	6.289
1.80V/cell	303.8	226.2	180.3	121.6	72.12	41.44	29.08	24.08	20.29	14.01	12.09	6.168
1.85V/cell	264.5	202.2	161.7	113.9	68.52	39.60	27.80	22.92	19.42	13.42	11.73	5.805


Constant Power Discharge Characteristics: W (25°C)

F. V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	3893	3558	2620	1887	1081	620.7	438.0	362.9	306.2	211.8	176.8	93.38
1.65V/cell	3813	2719	2052	1491	860.6	494.6	349.7	289.7	243.5	168.8	140.0	73.98
1.70V/cell	3600	2628	2025	1473	854.3	490.1	347.6	288.3	242.7	167.3	139.2	73.25
1.75V/cell	3241	2429	1930	1440	845.9	485.5	345.5	286.2	240.5	165.9	137.8	72.53
1.80V/cell	2916	2205	1774	1374	825.0	478.4	337.1	278.5	236.7	162.4	136.3	71.80
1.85V/cell	2517	1958	1584	1288	781.7	456.3	320.4	265.2	224.8	156.7	132.0	68.90


Discharge Characteristics Curve

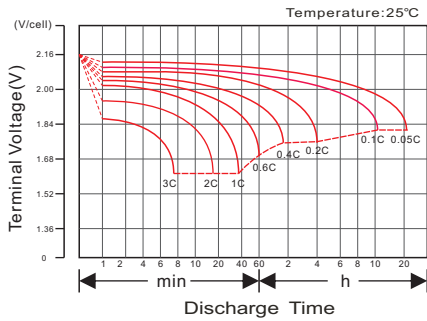


Charging Characteristics Curve

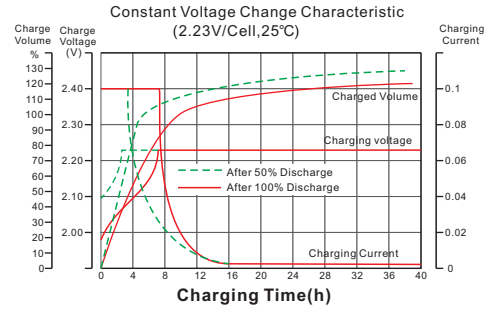


Cycle life in relation to depth of Discharge

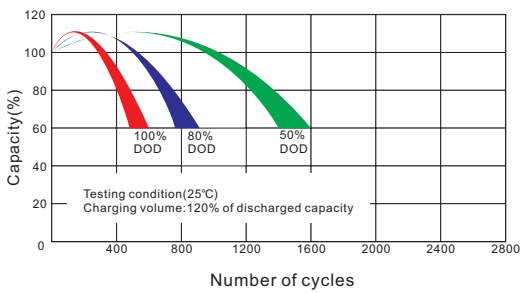


Temperature effects on Capacity

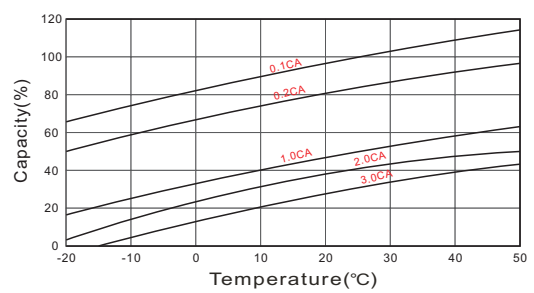


Relationship between charging voltage and temperature

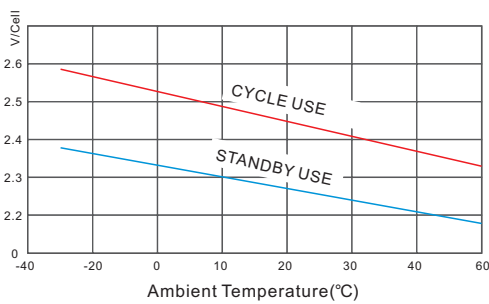

Self-discharge Characteristics

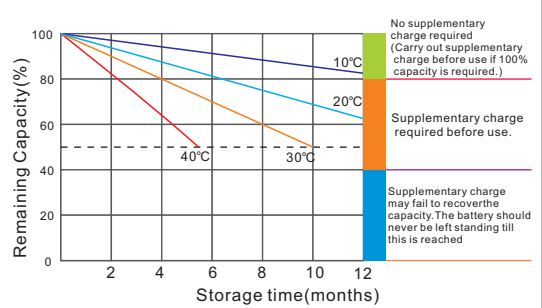

Temperature effects on Float life

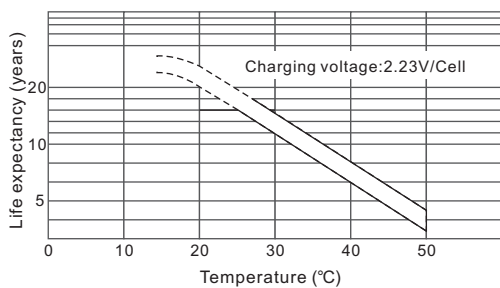

Life Characteristics of Standby use

